

---

**DESCRIPTION**

- a matting base designed to reduce the gloss level of Paracryl IF540 colours

**PRINCIPAL CHARACTERISTICS**

- specially formulated using the same durable resin system of the Paracryl IF540 range
- can reduce the gloss level of any Paracryl IF540 product - factory or tinted colours
- at the maximum addition rate of 1 litre Matting Base into 4 litre Paracryl IF540 Part A, low satin finishes can be achieved

**APPLICATION INSTRUCTIONS**

- Matting Base should be stirred well before use to ensure good homogeneity
- add the required amount of Matting Base into the Paracryl IF540 Part A and stir in thoroughly
- mix this blend with the Part B as normal
- when high levels of Matting Base are used, less thinner may be required. Check consistency before addition of thinner
- the gloss obtained is influenced by thinner levels, application conditions and film thickness. Always check dried film gloss level on a sample panel before final use and preferably after 24 hours curing
- always seal the container of Matting Base when not in use to avoid drying out of the product
- refer to Paracryl IF540 Technical Data Sheet P52.01 for details on use
- use in Paracryl IF540 colours only. Not for use in Paracryl IF540 Antigrffiti Clear
- Valspar recommends the use of coating inspection reports in compliance with AS/NZS 3894.10,11,12 refer to Information Sheet I-20 for more information
- for recommendations outside those contained in this data sheet, refer to Valspar

---

**SAFETY PRECAUTIONS**

- flammable. Avoid contact with heat and naked flame
- avoid contact with skin and eyes
- use gloves, mask and goggles during application
- provide adequate ventilation when using in confined spaces
- this product is intended for use in industrial situations by professional applicators in accordance with the advice given on this sheet. All work involving the use and application of this product should be carried out in compliance with all relevant Health, Safety & Environmental standards and regulations and must not be used without reference to the Material Safety Data Sheet (MSDS)

---

**PRECAUTIONS**

- for recommendations outside those contained in this data sheet, refer to Valspar

---

**PRODUCT COMPATIBILITY**


- Use only as directed in Paracryl IF540 solid colours
- Not suitable for use in Paracryl IF540 Metallic, Paracryl IF540 Antigrffiti Clear or any other products

---

**STORAGE AND PACKAGING**

- shelf life at least 12 months
- all components shall be stored in a dry internal environment at between 5°C and 35°C
- packaging 4 Litres
- product line: 201778.004

**ADDITIONAL DATA**

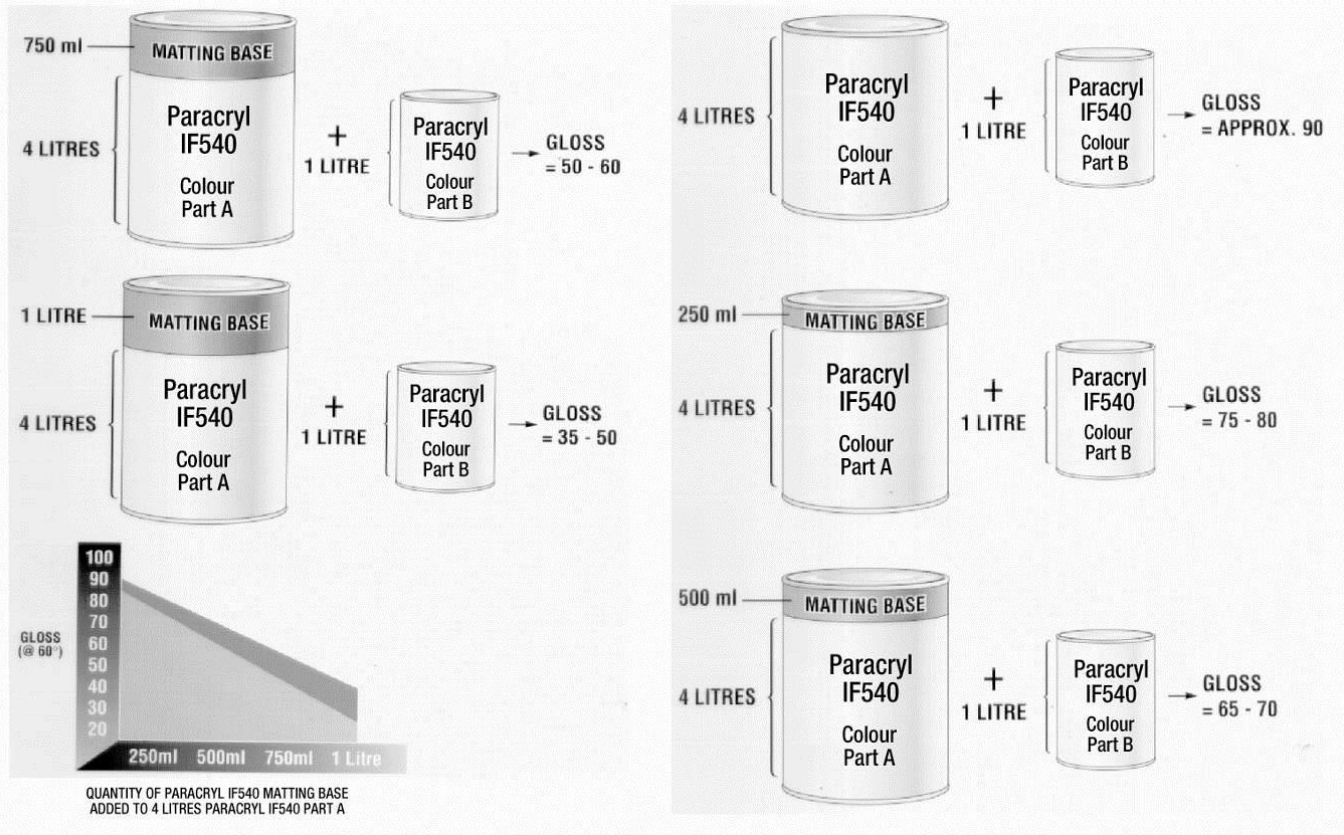

Valspar is committed to quality in the design, production and delivery of its products and services. Valspar's Australian manufacturing facilities quality management systems are certified to ISO9001.

Valspar's laboratory facilities are accredited for technical competence with the National Association of Tests Authorities, Australia (NATA) and comply with the requirements of ISO/IEC 17025. Accreditation No.104 (Footscray), 1154 (Glendenning) and 931 (Kilburn).



For the most up to date Information contact Valspar Customer Service Hotline or visit the Wattyl Website.

**CUSTOMER SERVICE HOTLINE  
WEBSITE**

**Australia  
132 101  
[www.wattylpc.com](http://www.wattylpc.com)**

**New Zealand  
0800 735 551  
[www.wattylpc.com](http://www.wattylpc.com)**

**Trademarks are the property of Valspar Paint (Australia) Pty Ltd.**

1. This information, provided by Valspar Paint (Australia) Pty Ltd (hereinafter referred to as "Valspar"), is important to ensure that the listed product(s) perform according to the stated application and uses and must be followed to meet Valspar's warranties express and implied. Valspar advises that you (a) review the Technical Data Sheets (TDS) and Material Safety Data Sheets (MSDS) before you use or handle the product; (b) ensure that the product be used only in accordance with the information provided by Valspar and the product(s) be transported, stored and handled in accordance with the information on the MSDS and relevant TDS; and (c) thoroughly test the product, using the recommended application method on a sample of intended substrate, before using the product. 2. The information in this TDS was prepared using information gathered during product development. While Valspar endeavours to update this information and maintain the accuracy and currency of its contents, Valspar does not warrant that the information provided is current when the product is used or is wholly comprehensive. 3. For all product and non-product related information, Valspar recommends that you conduct such additional investigations as may be necessary to satisfy yourself of the accuracy, currency and comprehensiveness of the information on which you rely in using and handling the product. If you require further information please contact your nearest Valspar office before using the product(s). 4. To the full extent permitted by law, Valspar's liability for breach of a condition or warranty implied into the contract for sale between Valspar and you by law is limited at Valspar's election to: (a) the replacement of the product; or (b) payment of the cost of replacing the product. If coating rectification is required Valspar Technical Services shall be contacted prior to commencement. VALSPAR PAINT (AUSTRALIA) PTY LTD (ABN 40 000 035 914)